


TLBA

Side-shift Shredder light model

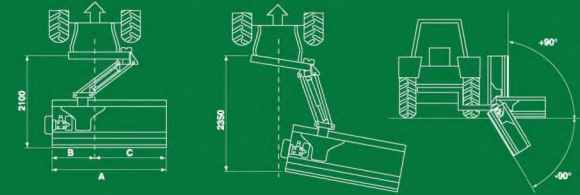

Mod.	(B/H/Z)	L	Kg	(Hp - Kw)	(g/min.)	14	Ø rotore mm	3
TLBA - 140	1560 / 1000 / 1800	1440	370	25/30 - 18/22	540	14	108	3
TLBA - 150	1660 / 1000 / 1800	1540	390	30/35 - 22/26	540	15	108	3
TLBA - 160	1760 / 1000 / 1800	1640	410	35/40 - 26/29	540	16	108	3

The technical data, specifications, characteristics and pictures are not binding for the manufacturer.

STANDARD EQUIPMENT

- Three point linkage
- Rear rubber protection
- Front safety with zinc-plated flaps
- Support foot
- Gearbox with free-wheel
- Cardan shaft
- Cap to protection of cardan
- Rotor with smooth hammers
- Belt drive
- Rear adjustable roller with scraper
- Internal counterframe
- Internal counterblades series
- Lateral skids
- Piston at double effect for lateral displacement with flow regulator
- Piston at double effect for inclination angle with blocking valve D.E. and flow regulator
- Articulation leveling
- Special paint powder or liquid (Primer and enamel)

ACCESSORIES ON REQUEST

- 1 External gearbox
- 2 Single W/constant velocity joint
- 3 Double w/constant velocity joint
- 4 Frontal attachment



TLBA

Side-shift Shredder light model

The universal TLBA shredder is a machine used for the shattering of the bushes of every kind proximity of ditches, banks, orchards and roadsides. The machine can work both laterally and like a normal shredder.



LIPA s.r.l.
65010 Spoltore (PE) - Italy
Via Castellani (ang. Via Mare Adriatico)
Tel. +39 085 4971431 Fax +39 085 4973170
info@lipa-srl.it www.lipa-srl.it

