



TM

Green Climber

Powerful, Reliable, Precise.

POWER UNDER

“REMOTE” CONTROL



mdbsrl.com

THE EXTREME REMOTE CONTROLLED MACHINE



REMOTE CONTROL

Intuitive and precise thanks to proportional movements, the remote control allows the operator to work in complete safety. The trajectory and speed can be adjusted in case of steep slopes. Furthermore, the command of the tracks is managed by a single joystick and can be driven with one hand leaving the other one free to carry out other movements of the machine.


CPU unit

A reliable technology manages the vital functions of the machine including: scheduled maintenance; timing and cleaning cycles of the radiator according to the engine temperature; engine stop in case of high temperature and eventual failure of oil suction on excessively steep slopes. It also provides a complete diagnosis of the operational state of the whole system. These are just a few of the features that can be managed by the CPU of the machine which makes it unique.

DESIGN

The Innovative design and maximum protection of all the components ensured by the hood made of reinforced fibreglass. The machine is also equipped with LED lights and rollbar. Self-cleaning radiator with reversible fan.



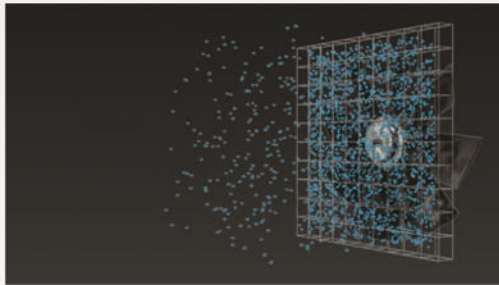

Autocleaning radiator with reversible fan.



Different type of track available



ADVANCED MAINTENANCE PROGRAM

Machine efficiency and cost control are key factors to be able to successfully conduct business nowadays. That's why a maintenance software has been installed inside the CPU ; the machine will suggest the next maintenance servicing.



NO OVERHEATING OF ENGINE, TRANSMISSION AND HYDRAULIC SYSTEM



UP TO 6% SAVING IN FUEL




LESS TIME NEEDED TO CLEAN AND REPAIR



UP TO 60% LESS POWER CONSUMPTION BY THE FAN



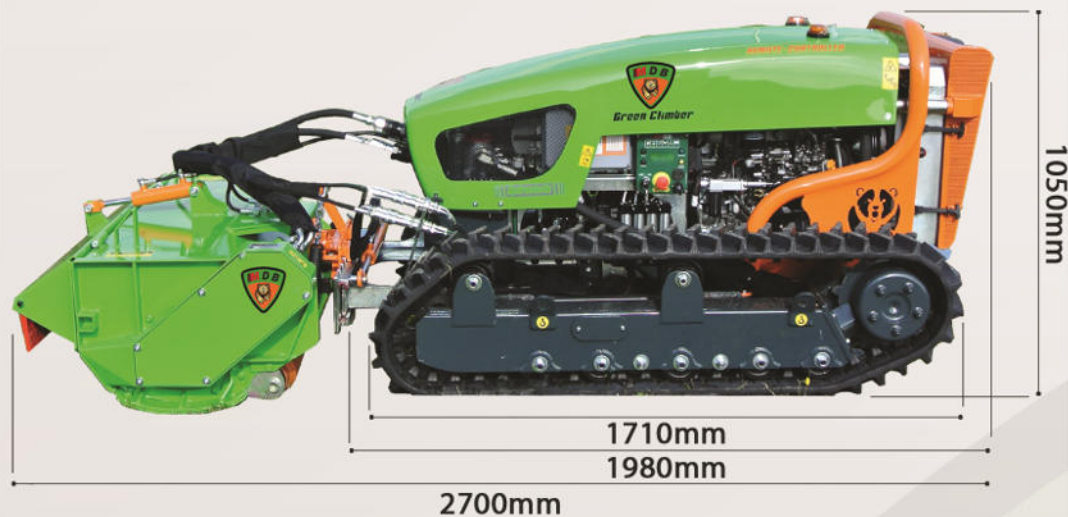

Green Climber		40HP	50HP
Net weight	Kg	1180	1198
Max work gradient	Degrees	60°	60°
Speed	Km/h	9	9
Engine power	Kw/CV	29 / 40	35 / 48
Torque	Nm/rpm	103 / 1800	135 / 1800
Fuel tank capacity	Lt	38	38
Fuel type	-	diesel	diesel
Engine cooling	-	liquid	liquid
Oil tank capacity	Lt	47	47
Reversible fan	-	yes	yes
Oil flow for attachment	Lt/Bar	65 / 250	65 / 250



Extendable carriage



1300mm



1700mm


Hydraulic side-shifting of attachment



400mm



400mm

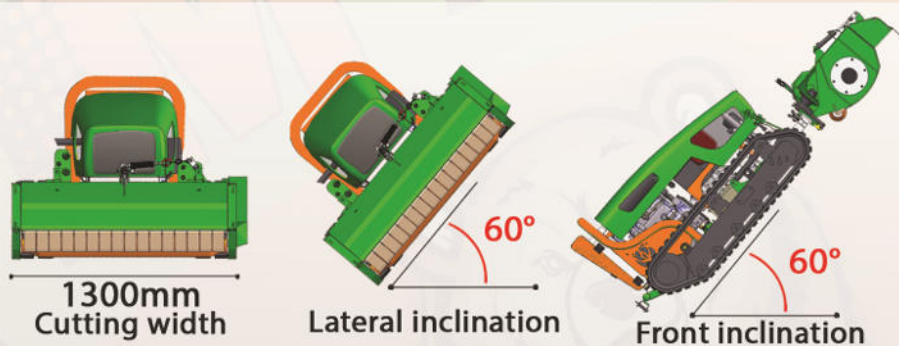

MDB srl

C.da S.Onofrio,6A - 66034 Lanciano (Ch) - Italy

Tel. (+39)0872 50221 - Fax (+39)0872 50231

Email - sales@mdbsrl.com

website - www.mdbsrl.com

